

100%
Recycled
Nylon

Net Effect B703

Interface®



333961
Black Sea

333962
North Sea

312898
Pacific

333964
Arctic

333965
Atlantic

333966
Caspian

333967
Sand

333968
Driftwood





333967 Sand
Installed: Herringbone



333962 North Sea & 333968 Driftwood (shown with B701)
Installed: Ashlar

Technical Specifications

Product Definition	Tufted Patterned Level Cut Tile
Konstruktion	Tuftgemusterte Veloursqualität
Descripción	Moqueta modular tufting pelo cortado con diseño
Description	Dalle de moquette à velours tufté coupé à motifs
Type	Getufte gedessineerde velours
Descrizione	Velluto tufted

Pile Material	100% Recycled BCF Solution Dyed Nylon contains pre and post consumer recycled content
Polfasermaterial	100% recyceltes Polyamid, enthält Anteile pre- und postconsumer recycelten Materials
Composición Fibra	100% Poliamida reciclada BCF tintada en masa con contenido reciclado pre y post consumo
Composition	Fibre polyamide BCF 100% recyclée teint en masse, contenant des éléments recyclés pré et post consommation
Poolmateriaal	100% gerecycled Solution Dyed Polyamide BCF, bevat 100% pre- en post-consumer gerecycled content
Fibra	100% Poliammide BCF riciolata tinta in massa con contenuto riciclato pre- e post -consumer

Pile Yarn Weight / Poleinsatzgewicht / Peso Fibra / Poids de fibre / Poolinsetgewicht / Peso Felpa	543g/m ² ± 5%
Total Weight / Gesamtgewicht / Peso Total Poids total / Totaalgewicht / Peso Totale	4159g/m ² ± 5%
Pile Height / Polschichtdicke / Altura Fibra / Hauteur de la fibre / Poolhoogte / Altezza Felpa	1,8 mm ± 0,3 mm
Total Thickness / Gesamtdicke / Espesor Total / Epaisseur totale / Totale dikte / Altezza Totale	5,5 mm ± 0,5 mm
Gauge/Ends 10 cm / Teilung x 10 cm / Galga x 10 cm / Jauge-Rangs par 10 cm / Rijen per 10 cm / Serraggio x 10 cm	5/64 – 50,4
Tufts per m² / Noppenzahl/m ² / Puntadas m ² / Densité du tuft par m ² / Aantal noppen per m ² / Densità Punti	171,360 ± 5%
Backing Type / Rückenkonstruktion / Soporte / Sous-couche / Ruguitvoering / Sottofondo	Graphlex®
Wear Classification / Beanspruchungsklasse / Clasificación al tráfico / Classement Gebruiksintensiteit / Resistenza all'usura	Heavy Contract (EN 1307) Class 33 / LC1

Style	32133
4m ² - 16 tiles per box (25 x 100 cm ± 0,2%)	

Radiant Panel / Schwerentflammbarkeit	(EN ISO 9239/1) Euroclass Cfl s1 (EN ISO 13501)
Hot Metal Nut	Pass, low radius of effects of ignition (BS 4790)
Dimensional Stability / Dimensionsstabilität / Estabilidad Dimensional / Stabilité dimensionnelle / Dimensionele stabiliteit / Test Stabilità dimensionale	≤ 0,2% (EN 986)

Sound Absorption					
125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
0.01	0.04	0.07	0.17	0.24	0.30

EN 14041

DOP: 1037/120835

textile floor covering

EN 1307

Ashlar Herringbone

Light Values

Product	Colour No	Colour Name	L Value*	Y Value*
Net Effect B703	333961	Black Sea	26.4	4.9
	333962	North Sea	35.7	8.8
	333963	Pacific	23.9	4.1
	333964	Arctic	44.3	14.1
	333965	Atlantic	26.3	4.9
	333966	Caspian	37.9	10.0
	333967	Sand	47.7	16.6
	333968	Driftwood	46.8	15.9

* **Light Value:** L Value = L according to CIE L*a*b* colour space, Y Value = Light Reflectance Value according to BS 8493
Lichtreflexionswerte: L-Wert = L gemäß CIE L*a*b* Farbspektrum, Y-Wert = Lichtreflexionswert gemäß British Standard BS 8493

Valores de Reflectancia de Luz: Valor L = L según CIE L*a*b* espacio de color, Valor Y = Valor de reflectancia de luz según el estándar británico BS 8493

Valeurs concernant la lumière: Valeur L = L faisant référence à la méthode CIE L*a*b* pour la couleur, Valeur Y = Valeurs de réflectance de la lumière selon le British Standard BS 8493

Licht waarden: L Waarde = L volgens CIE L*a*b*kleurruimte, Y Waarde = Licht Reflectie Waarde volgens BS 8493

Indici di riflettanza alla luce: Indice L = L secondo CIE L*a*b* colour space, Indice Y = Indice di riflettanza alla luce secondo la norma BS 8493

Environmental Data Sheet

Construction			
Yarn system	BCF Solution Dyed Nylon (PA6)		
Backing system	Graphlex*		
Recycled Content	Total	Pre Consumer	Post Consumer
Yarn average	100,00%	50,00%	50,00%
Product average	62,93%	56,43%	6,51%
Recycled content can be subject to differences between colours. See details for individual colours on next page.			
Carbon Footprint			
Global Warming Potential (kgs CO ₂ equivalents/sq meter)			
Full life-cycle carbon footprint (following our EPD results or EPD calculation method)	Raw materials and Production:	6.19 kg CO ₂ eq./m ²	
	Delivery and installation:	0.63 kg CO ₂ eq./m ²	
	Use (10 years):	2.85 kg CO ₂ eq./m ²	
	End of life (waste to energy):	7.90 kg CO ₂ eq./m ²	
	TOTAL (10 years' lifetime):	17.57 kg CO ₂ eq./m ²	
CO ₂ compensation	Carbon neutral Cool Carpet* is standard		
Manufacturing			
Location	Scherpenzeel, NL Factory is certified ISO 14001 since 1996 and ISO 9001 since 1990		
Installation Impacts			
TacTiles™	Optimised for glue-free installation with TacTiles™ connectors with virtually zero VOCs		
Installation Waste	In a typical installation* using the installation method below:		
	Herringbone – 3-5 % installation waste		
	Ashlar - 3-5% installation waste		
For reference: 2 metre wide broadloom typically generates 7-10 % installation waste			
* In a rectangular building, installed before walls.			
End-of-life			
Alternatives to landfill	Reuse: Can be cleaned and reused in a non-critical location to extend its useful life		
	Recycling: Can be returned through the Interface ReEntry scheme and be re-used as raw material in new carpet tiles		
Waste-to-Energy: Can be incinerated in appropriate waste to energy plant			
Indoor Air Quality			
GUT (Gemeinschaft umweltfreundlicher Teppichboden)	The product passes all requirements of GUT's testing criteria regarding hazardous substances, emissions and odour. GUT PRODIS certificate number: 84440EDC		
CRI (Carpet & Rug Institute)	Compliant to LEED IQ 4.3 credit (tested in Eurofins to the equivalent test of the CRI Green Label Plus)		
Compliance to Green Building Schemes			
See next page to check how our products contribute to the main green building certification schemes (BREEAM, LEED, HQE and DGNB)			
Type III Environmental Product Declaration			
EPD according to ISO 14025	This product is covered by the Environmental Product Declaration EPD-IFF-2012831-E		


Recycled content – colour level						
Colourway	Total Recycled Content	Pre consumer recycled content	Post consumer recycled content	Total yarn recycled content	Yarn pre-consumer	Yarn post-consumer
332912 Black Sea	63,18%	56,67%	6,51%	100,00%	50,00%	50,00%
332913 North Sea	63,18%	56,67%	6,51%	100,00%	50,00%	50,00%
332914 Pacific	63,18%	56,67%	6,51%	100,00%	50,00%	50,00%
332915 Arctic	62,52%	56,02%	6,51%	100,00%	50,00%	50,00%
332916 Atlantic	63,18%	56,67%	6,51%	100,00%	50,00%	50,00%
332917 Caspian	63,18%	56,67%	6,51%	100,00%	50,00%	50,00%
332918 Sand	62,52%	56,02%	6,51%	100,00%	50,00%	50,00%
332919 Driftwood	62,52%	56,02%	6,51%	100,00%	50,00%	50,00%

Compliance to Green Building Schemes	
BREEAM (UK and international)	<p>BRE Green Guide Ratings:</p> <ul style="list-style-type: none"> Office - Not Available Education - Not Available Health Care - Not Available Retail (by fashion) - Not Available <p>Potential contribution to following categories and credits:</p> <ul style="list-style-type: none"> Hea 02 - Indoor air quality – minimising sources of air pollution Hea 05 - Acoustic Performance Mat 01 - Life Cycle Impacts Mat 05 - Designing for robustness Wst 01 - Construction Waste Management
LEED 2009 US	<p>Potential direct or indirect contribution to following categories and credits:</p> <ul style="list-style-type: none"> Indoor Environmental Quality <ul style="list-style-type: none"> Credit 4.1 Low Emitting Materials: Adhesive & Sealants Credit 4.3 Low Emitting Materials: Carpet Systems Materials and Resources <ul style="list-style-type: none"> Credit 2.1 Construction Waste Management Credit 4.1 Recycled content Credit 5.1 Regional Materials Innovation and Design <ul style="list-style-type: none"> Credits 1-4 1 Pilot Credit 43, Certified Products
HQE (FR)	<p>Potential direct or indirect contribution to several points within following targets:</p> <ul style="list-style-type: none"> 2. Integrated choice of products and construction materials 3. Low site nuisance 9. Acoustic comfort 10. Visual comfort 11. No unpleasant smells 12. Sanitary quality of areas 13. Sanitary air quality
DGNB (D)	<p>Potential direct or indirect contribution to following criterion</p> <p>ENVIRONMENTAL QUALITY</p> <ul style="list-style-type: none"> ENV1.2 Local Environmental Impact <p>ECONOMIC QUALITY</p> <ul style="list-style-type: none"> ECO1.1 Building-Related Lifecycle Costs ECO2.1 Efficient Use of Space <p>SOCIOCULTURAL AND FUNCTIONAL QUALITY</p> <ul style="list-style-type: none"> SOC1.2 Indoor Air Quality SOC1.3 Acoustic Comfort <p>TECHNICAL QUALITY</p> <ul style="list-style-type: none"> TEC1.5 Ease of Cleaning and Maintenance TEC1.6 Ease of Dismantling and Recycling



TacTiles™

- A smarter, more sustainable way to install carpet tiles
- No need for liquid adhesives
- Fitting tiles is quick, clean and easy and the process virtually eliminates emissions
- No damage to sub floors, and nothing to stop you lifting or moving the carpet whenever you want

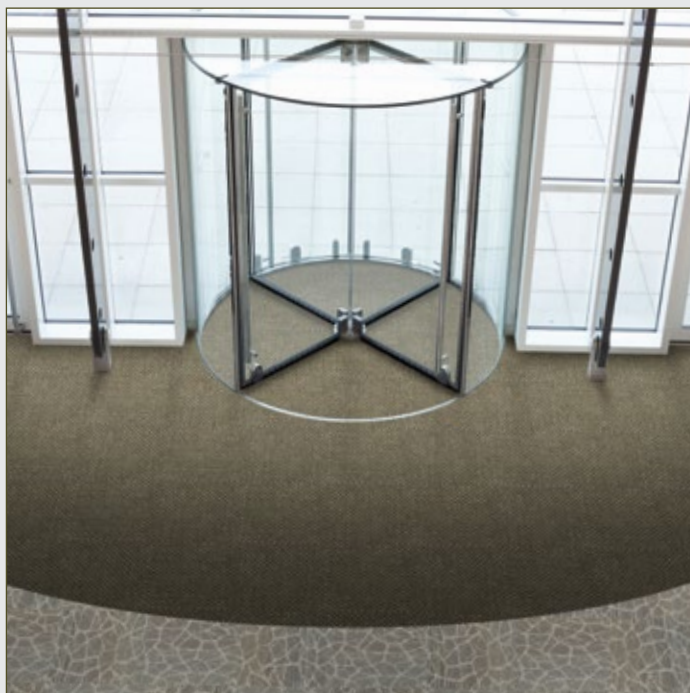

Entrance Matting

Incredibly tough, hard-wearing and practical; indoor entrance matting acts as the first line of defence to any interior by removing almost 100% of dirt, rain and mud before it's walked into your flooring.

Both of the products in our commercial entrance matting range – Barricade and Foyer – are resilient, functional, easy to maintain and stylish. And it's for these reasons that our barrier matting forms an essential part of any maintenance programme needed to keep your floorcovering looking its very best.