




Interface® | HN 810

SPECIFICATION


| | | | |
|--------------------------------|--|---------------------------------------|--|
| Product definition | Tufted Patterned Structured Tip Sheared Tile | Style number | 30805 |
| Pile Material | 100% Recycled Solution Dyed Nylon | Wear Classification | EN 1307 33 Heavy Contract |
| Pile Yarn Weight | 1150g/m ² ± 5% | Radiant panel | (EN ISO 9239/1) Euroclass Cfl s1 (EN ISO 13501) |
| Total Weight | 5077g/m ² ± 5% | Hot Metal Nut | Pass, low radius of effects of ignition (BS 4790) |
| Pile Height | 5.0 mm ± 0.3 mm | Castor Chair Rating | ≥ 2.4 (EN 985) |
| Total Thickness | 9.8 mm ± 0.5 mm | Dimensional Stability | ≤ 0.2% (EN 986) |
| Gauge/Ends per 10cm | 1/10 - 39.4 | Vertical Electrical Resistance | |
| Tufts per m² | 116,230 ± 5% | Colour Fastness - Light | ≥ 7 (ISO 105/B02) |
| Backing Type | Graphlex® | Tiles per Box | 12 - 3m ² (25 cm x 100 cm ± 0.2%) |

CE
06
0336-CPD-8538



EN 1307

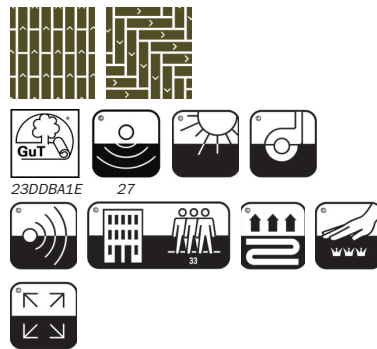

Mission Zero:
our promise to eliminate
any negative impact our company
may have on the environment
by the year 2020.

www.interface.com